

# CXL 230-3LW/DAB

Lightweight, 3 dBd Base Station and Marine Antenna for the DAB Band

PROCOM


## DESCRIPTION:

- ★ CXL 230-3LW/DAB is a vertically polarised, omnidirectional base station and marine antenna, which covers the DAB (Digital Audio Broadcast) Band.
- ★ Approximately 3 dBd gain.
- ★ Provided with the sturdy "LW" mast mount – a lightweight, multipurpose, epoxy-coated mounting bracket made of non-corrosive aluminium.
- ★ The accompanying U-bolts and fittings are made of stainless steel.
- ★ To be mounted on vertical or horizontal mast tubes, 16 to 54 mm in outer diameter.
- ★ The cable can be led either on the outside or along the inside of the mast tube.
- ★ Large bandwidth with respect to both SWR and gain.
- ★ The phasing of the radiating elements is adjusted to yield maximum gain in the horizontal plane, with the level of the sidelobes reduced to a minimum.
- ★ The carefully designed, broad-banded antenna element is sealed in a high-quality conical glassfiber tube with low wind-load, which will ensure undisturbed performance by corrosive environments.
- ★ All metal parts in the antenna are DC-grounded to reduce the noise caused by atmospherical discharge. Consequently, the antenna shows a DC-short across the coaxial cable.
- ★ The CXL 230-3LW/DAB is a vibration-proof, lightweight, slim-line, corrosion resistant, modern style base station and marine antenna.


## SPECIFICATIONS:

ELECTRICAL	
MODEL	CXL 230-3LW/DAB
ANTENNA TYPE	Broad-banded colinear antenna
FREQUENCY	223-240 MHz
IMPEDANCE	Nom. 50 Ω
RADIATION	Omnidirectional
POLARISATION	Vertical
GAIN	5 dBi 3 dBd
HALF POWER BEAMWIDTH	30°
BAND WIDTH	17 MHz
SWR	≤ 1.5
MAX. POWER	150 watts
ANTISTATIC PROTECTION	All metal parts DC-grounded (connector shows a DC-short)
MECHANICAL	
TEMP. RANGE	-30° C → +70° C
CONNECTOR	N-female
WIND SURFACE	0.0461 m <sup>2</sup>
WIND LOAD	59 N @ 160 km/h
COLOUR	Marine white
MATERIALS	Shroud: Polyurethane coated glassfiber Mounting bracket: Seawater resistant aluminium, epoxy-coated Clamps: Stainless steel
TOTAL HEIGHT	Approx. 1.9 m
WEIGHT	Approx. 1.3 kg
MOUNTING	On 16 to 54 mm dia. mast tube

MULTI-PURPOSE MOUNTING BRACKET:

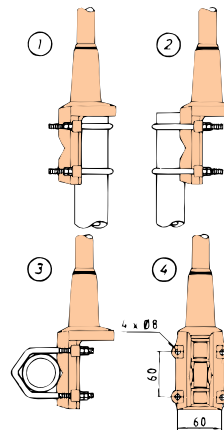


- ① Mast tube D<sub>o</sub> min = 30 mm  
Mast tube D<sub>o</sub> max = 54 mm
- ② Mast tube D<sub>o</sub> max = 54 mm  
Mast tube D<sub>o</sub> min = 16 mm
- ③ Mast tube D<sub>o</sub> max = 54 mm  
Mast tube D<sub>o</sub> min = 16 mm

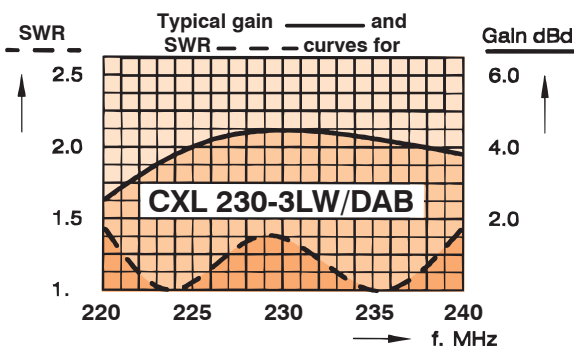

### PLEASE NOTE:

The antenna is delivered with a DC-connection between the antenna element and the mounting bracket.

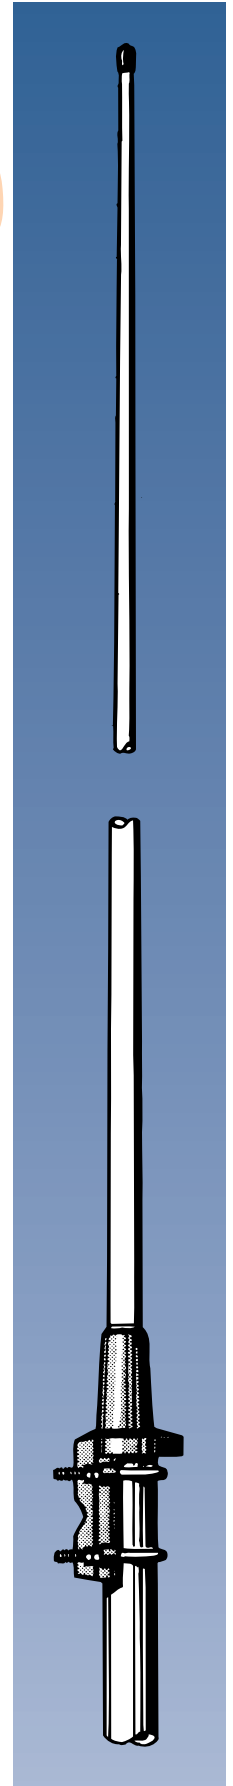


# CXL 230-3LW/DAB

Lightweight, 3 dBd Base Station and Marine Antenna for the DAB Band



## TYPICAL RADIATION PATTERN (E-PLANE)

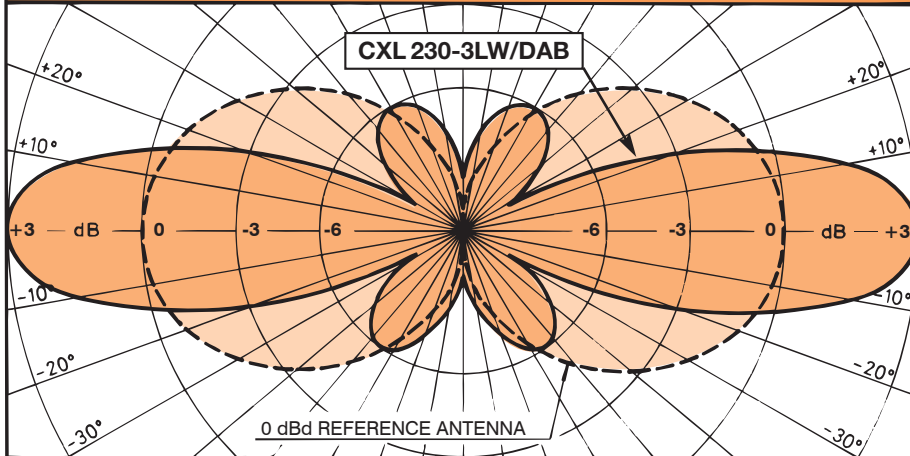

DAB

## TYPICAL RADIATION PATTERN (H-PLANE)

