


BPF 70/3

Band-Pass Filter for the 70 cm Band



DESCRIPTION:

- ★ The BPF 70/3 is a $3\frac{1}{4}\lambda$ resonator band-pass filter with internal coupling between the resonators.
- ★ This filter can be used as a preselector to protect a receiver against interference from transmissions out of the passband, or it can be used to reduce spurious output from a transmitter with up to 50 watts output power.
- ★ The filter can be tuned within the entire 406-470 MHz band. Careful design and choice of materials ensure reliable operation over a wide temperature range.
- ★ The housing is made of extruded aluminium, the chassis of brass, and teflon insulation has been used in the coaxial cables and in the connectors.
- ★ The filter is black vinyl coated to prevent corrosion.

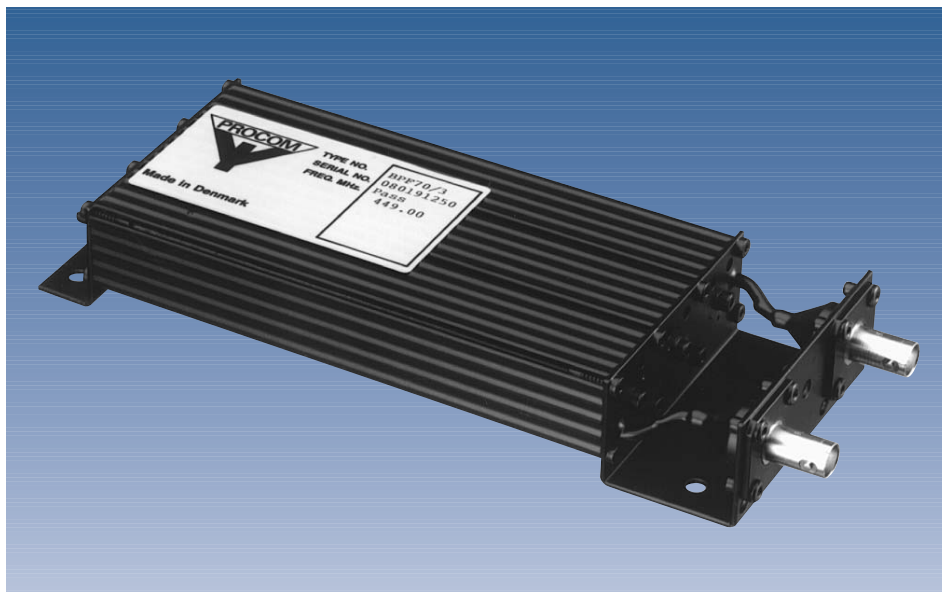

SPECIFICATIONS:

ELECTRICAL	
MODEL	BPF 70/3
FILTER TYPE	Band-pass filter
TUNING RANGE	406-470 MHz
MAX. INPUT POWER	50 watts
INSERTION LOSS	≤ 1.4 dB (typ.)
ATTENUATION AROUND PASS-BAND	See curves
OUT OF BAND ATTENUATION	See curves
IMPEDANCE	Nom. 50 Ω
SWR	≤ 1.5
MECHANICAL	
TEMP. RANGE	-30° C \rightarrow +60° C
CONNECTORS	BNC-female (others on request)
DIMENSIONS (L x W x H)	230 x 77 x 33 mm
WEIGHT	Approx. 550 g

TYPICAL RESPONSE CURVES:

