

GPS/Iridium-FME

Lightweight Circularly Polarized Quadrifilar Helix for Mast Mounting

DESCRIPTION

- Passive quadrifilar helix antenna for fixed installation.
- Covering Iridium band: 1616 - 1626.5 MHz
- Right-hand circular polarization (RHCP).
- The circular polarization minimizes the fading effect often encountered in environments with reflecting obstacles.
- Suitable for mounting on 1" threaded water pipe.
- Comprehensive range of accessory mounting brackets available to make the perfect installation for your specific needs.




ORDERING DESIGNATIONS

TYPE	PRODUCT NO.
GPS/Iridium-FME	112000050

SPECIFICATIONS

ELECTRICAL	
MODEL	GPS/Iridium-FME
ANTENNA TYPE	Passive quadrifilar helix antenna
FREQUENCY	1600 - 1650 MHz
IMPEDANCE	Nom. 50 Ω
POLARIZATION	Circular right-hand
COVERAGE	Hemispherical
GAIN	Approx. 2 dBic 0 dBd
BANDWIDTH	50 MHz
SWR	≤ 2.0
MAX. POWER	2 W
MECHANICAL	
TEMP. RANGE	-30°C → +70°C
CONNECTOR	FME (male)
WIND SURFACE	Approx. 0.0072 m ²
MAX. WIND SPEED	200 km/h
WIND LOAD	Approx. 9.6 N @ 150 km/h
COLOUR	Marine white
MATERIALS	Shroud: Weather resistant low loss plastic
TOTAL HEIGHT	Approx. 23 cm
ANTENNA DIA.	33 mm
WEIGHT	Approx. 140 g
MOUNTING	On 1" threaded water pipe or on PROCOM 1" mounting brackets (see below)

ACCESSORIES (to be ordered separately)

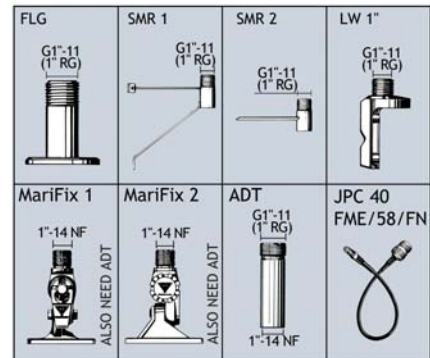

PROCOM A/S reserve the right to amend specifications without prior notice.

27/09/11