

# PRO-ATT 6 dB-2-3-N

Attenuator 2 W


## DESCRIPTION

- This 2 W series includes 3 dB, 6 dB, 10 dB, 20 dB and 30 dB attenuators.
- This series of attenuators has very low SWR and attenuation flatness and is especially suitable for use with:
  - Coaxial Transmission Lines
  - Power Monitors
  - Watt meters
- The attenuators are suitable for outdoor applications.



## SPECIFICATIONS

| ELECTRICAL               |                    |
|--------------------------|--------------------|
| MODEL                    | PRO-ATT 6 dB-2-3-N |
| FREQUENCY RANGE          | DC - 3 GHz         |
| MAX. INPUT POWER         | 2 W                |
| ATTENUATION              | 6 dB               |
| VARIATION on ATTENUATION | +0.5 dB            |
| IMPEDANCE                | Nom. 50 $\Omega$   |
| VSWR                     | <1.2               |
| MECHANICAL               |                    |
| TEMP. RANGE              | -35°C → +70°C      |
| CONNECTORS               | N-female           |
| DIMENSIONS               | 58 x 17.5 mm       |
| WEIGHT                   | Approx. 77 g       |

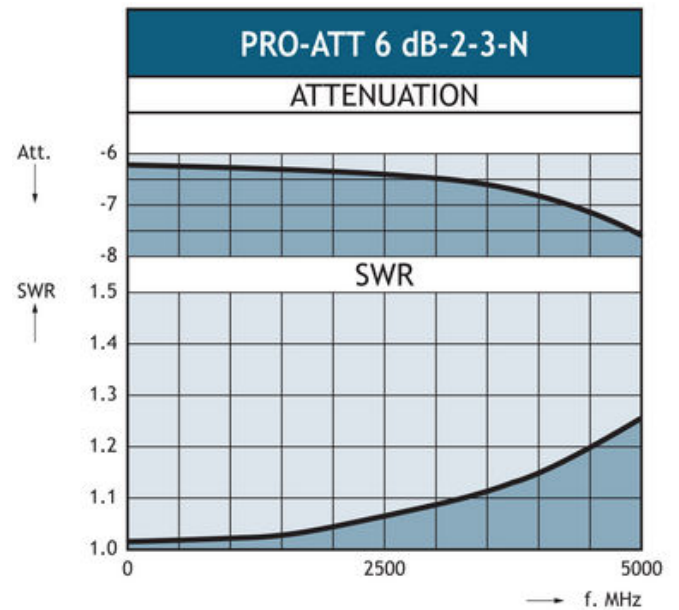

PROCOM A/S reserve the right to amend specifications without prior notice.

20/02/2009