

# PRO-ATT 20 dB-2-3-N

Attenuator 2 W

## DESCRIPTION

- This 2 W series includes 3 dB, 6 dB, 10 dB, 20 dB and 30 dB attenuators.
- This series of attenuators has very low SWR and attenuation flatness and is especially suitable for use with:
  - Coaxial Transmission Lines
  - Power Monitors
  - Watt Meters
- The attenuators are suitable for outdoor applications.




## ORDERING DESIGNATIONS

TYPE	PRODUCT NO.
PRO-ATT 20 dB-2-3-N	200001745

## SPECIFICATIONS

ELECTRICAL	
MODEL	PRO-ATT 20 dB-2-3-N
FREQUENCY RANGE	DC - 3 GHz
MAX. INPUT POWER	2 W
ATTENUATION	20 dB
VARIATION ON ATTENUATION	-0.1/+1.0 dB
IMPEDANCE	Nom. 50 $\Omega$
VSWR	<1.25
MECHANICAL	
TEMP. RANGE	-35°C → +70°C
CONNECTORS	N-female
DIMENSIONS	58 x 17.5 mm
WEIGHT	Approx. 77 g

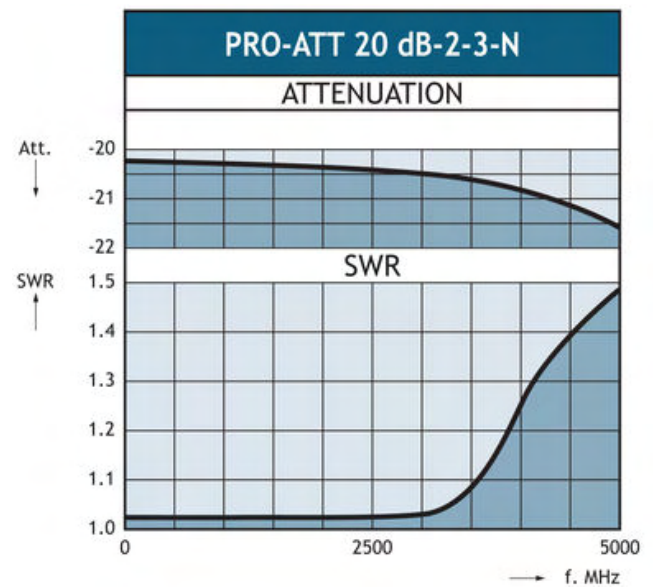

PROCOM A/S reserve the right to amend specifications without prior notice.

03/12/2009