

# PRO-ATT 10 dB-100-3-N

Attenuator 100 W

## DESCRIPTION

- This series includes 3 dB, 6 dB, 10 dB, 20 dB and 30 dB attenuators.
- This series of attenuators has very low SWR and attenuation flatness and is especially suitable for use with:
  - Coaxial Transmission Lines
  - Power Monitors
  - Watt Meters
- The attenuators are suitable for outdoor applications.
- The attenuators have a finish of black anodizing.




## ORDERING DESIGNATIONS

TYPE	PRODUCT NO.
PRO-ATT 10 dB-100-3-N	200001758

## SPECIFICATIONS

ELECTRICAL	
MODEL	PRO-ATT 10 dB-100-3-N
FREQUENCY RANGE	DC - 3 GHz
MAX. INPUT POWER	100 W
ATTENUATION	10 dB
VARIATION on ATTENUATION	+1.0 dB
IMPEDANCE	Nom. 50 $\Omega$
SWR	<1.3
MECHANICAL	
TEMP. RANGE	-35°C → +70°C
CONNECTORS	N-female
DIMENSIONS (L x W x H)	161 x 138 x 65 mm
WEIGHT	Approx. 1280 g

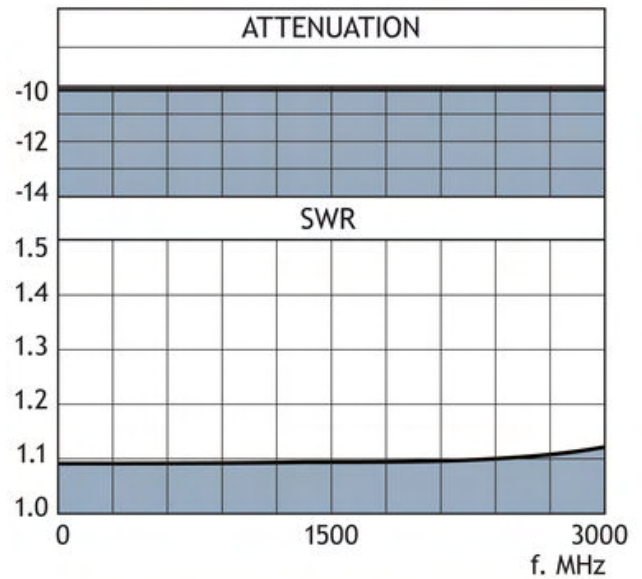

PROCOM A/S reserve the right to amend specifications without prior notice.

23/11/2010