

PRO-ATT 20 dB-100-3-N

Attenuator 100 W

DESCRIPTION

- This series includes 3 dB, 6 dB, 10 dB, 20 dB and 30 dB attenuators.
- This series of attenuators has very low SWR and attenuation flatness and is especially suitable for use with:
 - Coaxial Transmission Lines
 - Power Monitors
 - Watt Meters
- The attenuators are suitable for outdoor applications.
- The attenuators have a finish of black anodizing.




ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-----------------------|-------------|
| PRO-ATT 20 dB-100-3-N | 200001743 |

SPECIFICATIONS

| ELECTRICAL | |
|--------------------------|-----------------------|
| MODEL | PRO-ATT 20 dB-100-3-N |
| FREQUENCY RANGE | DC - 3 GHz |
| MAX. INPUT POWER | 100 W |
| ATTENUATION | 20 dB |
| VARIATION on ATTENUATION | +1.2 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | <1.3 |
| MECHANICAL | |
| TEMP. RANGE | -35°C → +70°C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 161 x 138 x 65 mm |
| WEIGHT | Approx. 1280 g |

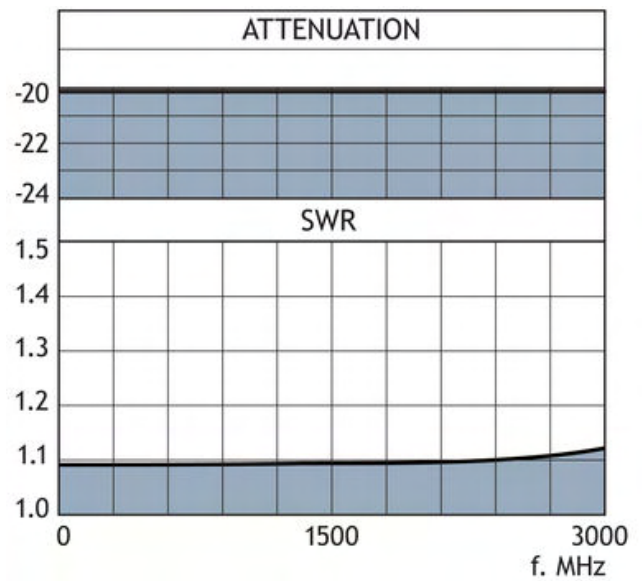

PROCOM A/S reserve the right to amend specifications without prior notice.

23/11/2010