

CAVITIES

BPBR 2/...-125 Band-Pass/Band-Reject Filters for the 150 MHz Band



DESCRIPTION:

- ★ High power base station band-pass/band-reject filters for the 140–175 MHz range.
- ★ The use of large $\varnothing 125$ mm cavities means a high Q, resulting in a very narrow pass/reject spacing.
- ★ The large dimensions also mean a high power rating.
- ★ Unloaded Q of a single cavity is approx. 4500.
- ★ High frequency stability on temperature and power.
- ★ Mounted on 19" brackets.**



BPBR 2/1-125



BPBR 2/2-125 **



BPBR 2/3-125 **

SPECIFICATIONS:

ELECTRICAL			
MODEL	BPBR 2/1-125	BPBR 2/2-125	BPBR 2/3-125
FREQUENCY RANGE	140–175 MHz	140–175 MHz	140–175 MHz
MAX. INPUT POWER	250 W	250 W/250 W	
INSERTION LOSS	See figure 1 (0.7 dB @ 500 kHz)	See figure 2 (1.4 dB @ 500 kHz)	See figure 3 (2.1 dB @ 500 kHz)
ATTENUATION	See figure 1	See figure 2	See figure 3
IMPEDANCE	Nom. 50 Ω	Nom. 50 Ω	Nom. 50 Ω
SWR (at resonance)	< 1.5 < 1.5	< 1.5	
MECHANICAL			
TEMP. RANGE	-30° C → +60° C RH 0-90% non-condensing	-30° C → +60° C RH 0-90% non-condensing	-30° C → +60° C RH 0-90% non-condensing
FREQ. STABILITY	Approx. 1.5 ppm/° C	Approx. 1.5 ppm/° C	Approx. 1.5 ppm/° C
CONNECTORS	N-female	N-female	N-female
DIMENSIONS	$\varnothing 125$ x 600 mm	D: 125 x W: 285 x H: 600 mm	D: 125 x W: 425 x H: 600 mm
WEIGHT	Approx. 1.9 kg	Approx. 4 kg	Approx. 6.5 kg

PROCOM A/S reserve the right to amend specifications without prior notice.

CAVITIES

BPBR 2/...-125

Band-Pass/Band-Reject Filters
for the 150 MHz Band

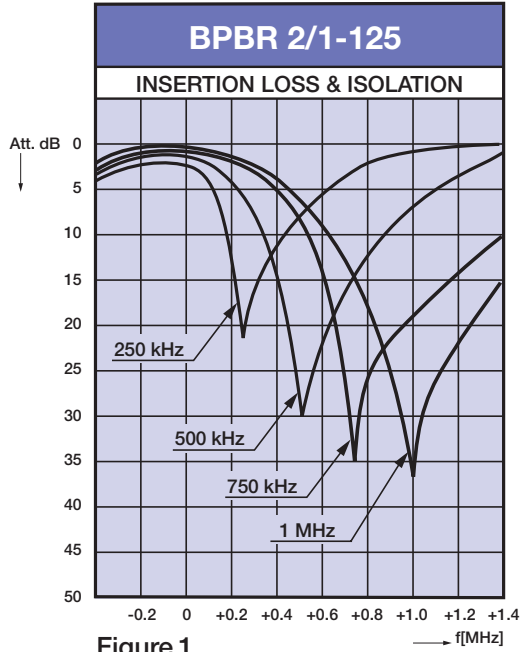


Figure 1

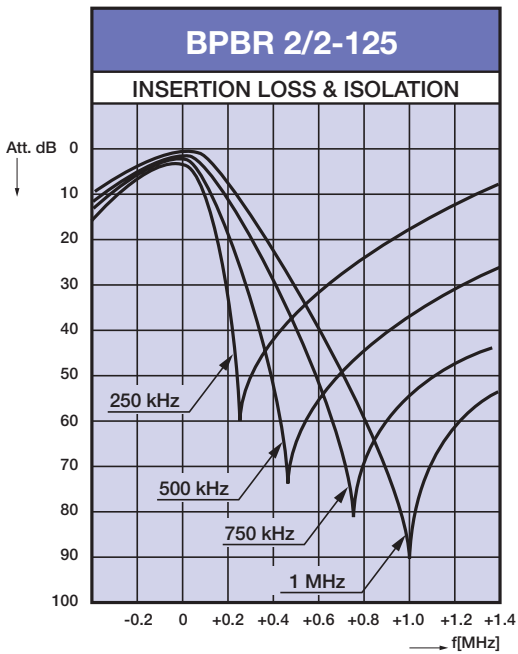


Figure 2

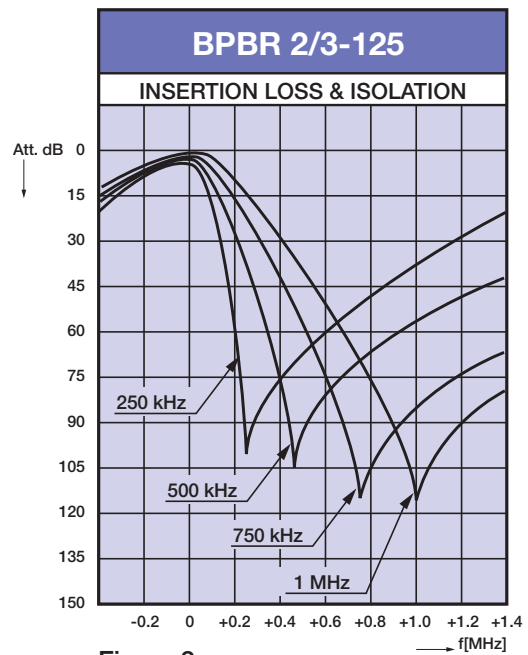


Figure 3