


DPF 4/6 S

6-Resonator Duplexer for the 80 MHz Band



DESCRIPTION:

- ★ The DPF 4/6 S is a 6-resonator duplex filter for duplex radiotelephones.
- ★ This filter is primarily intended for equipment, where the TX and the RX operate on single frequencies, but it can also, however with slightly reduced data, be used where the TX and RX operate on several channels, i.e. within a certain port bandwidth. In the last case, factory tuning is recommended.
- ★ The filter can be tuned within the complete 66-88 MHz range with a duplex separation between 4 and 13 MHz.
- ★ The filter has very small dimensions owing to the use of high-Q, temperature compensated helical resonators with discrete-component interconnections.
- ★ The housing is made of extruded aluminium, the chassis of passivated steel, and the connectors are provided with teflon insulation.
- ★ The filter is black vinyl coated to prevent corrosion.

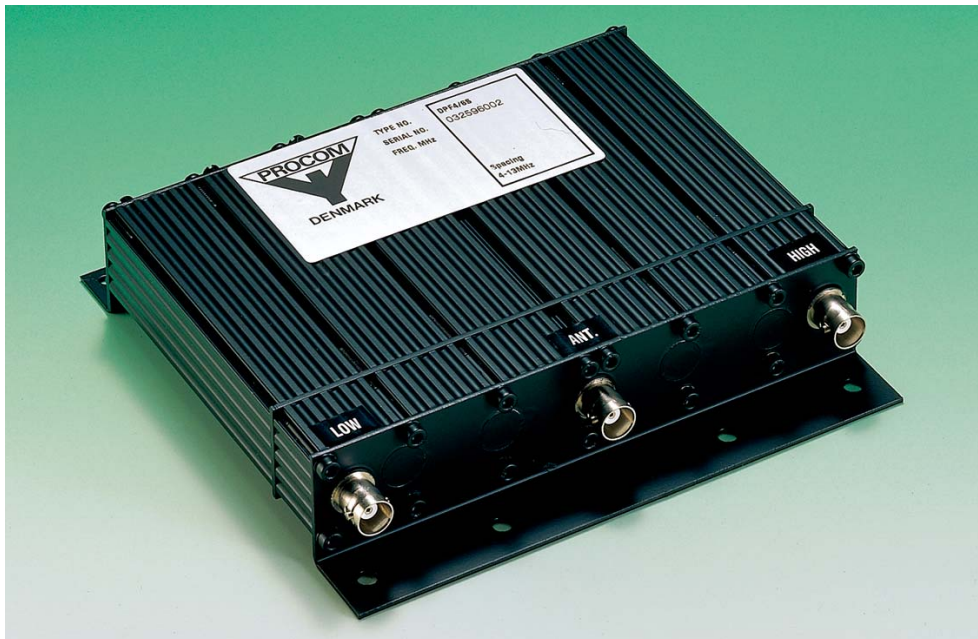

SPECIFICATIONS:

ELECTRICAL

MODEL	DPF 4/6 S
TX/RX FREQUENCY	66-88 MHz
MAX. INPUT POWER	50 watts
INSERTION LOSS TX-ANT AND ANT-RX (at 4 MHz duplex spacing)	
Single-channel tuned	< 1.2 dB
Multi-channel tuned, 2 MHz BW	< 1.3 dB
TX NOISE SUPPRESSION ON RX-FREQUENCY	
Single-channel tuned	> 80 dB
Multi-channel tuned, 2 MHz BW	> 40 dB
RX ISOLATION ON TX-FREQUENCY	
Single-channel tuned	> 80 dB
Multi-channel tuned, 2 MHz BW	> 40 dB
DUPLEX SPACING	3-16 MHz (see table)
IMPEDANCE	Nom. 50 Ω
SWR	≤ 1.4

MECHANICAL

TEMP. RANGE	-30° C \rightarrow +60° C
FREQ. STABILITY	Approx. 9 ppm/° C
CONNECTORS	BNC-female
DIMENSIONS (L x W x H)	170 x 154 x 33 mm
WEIGHT	Approx. 1050 g

MODEL SELECTION TABLE:

DUPLEX SPACING (MHz)	ORDERING DESIGNATION
3-4	DPF 4/6 S-3/4
4-13	DPF 4/6 S-4/13

PLEASE NOTE:

This filter type can also be delivered with the resonators stacked 3 over 3, thereby accommodating special space restrictions. In this case please order DPF 4/33 S.

PROCOM A/S reserve the right to amend specifications without prior notice.

DPF 4/6 S

6-Resonator Duplexer for the 80 MHz Band



TYPICAL RESPONSE CURVES @ 4 MHz DUPLEX SPACING:

