

CXL 1800-3

3 dBd Omnidirectional Marine and Base Station Antenna for the 1800 MHz Band







DESCRIPTION:


- ★ Vertically polarised, omnidirectional marine and base station antenna.
- ★ Approximately 3 dBd gain.
- ★ Simple mounting using the 1" revolving nut system.
- ★ Wide variety of accessory mounting brackets available.
- ★ Large bandwidth with respect to both SWR and gain.
- ★ Highly suitable for duplex operation with large spacing between the TX and the RX frequencies, e.g. the DCS-1800/PCN cellular system.
- ★ The antenna element is sealed in a high-quality, conical glassfiber tube.
- ★ All metal parts in the antenna are DC-grounded to reduce the noise caused by atmospherical discharge. Consequently, the antenna shows a DC-short across the coaxial cable.
- ★ The CXL 1800-3 is a vibration-proof, lightweight, slim-line, corrosion resistant, modern style marine and base station antenna.

SPECIFICATIONS:

ELECTRICAL	
MODEL	CXL 1800-3
ANTENNA TYPE	Coaxial, colinear antenna, broad-banded
FREQUENCY	1710-1880 MHz
IMPEDANCE	Nom. 50 Ω
POLARISATION	Vertical
GAIN	5 dBi (3 dBd)
BANDWIDTH	≥ 170 MHz at SWR ≤ 2.0
SWR	≤ 2.0, typ. ≤ 1.75
MAX. POWER	100 watt
ANTISTATIC PROTECTION	All metal parts DC-grounded (Connector shows a DC-short)
MECHANICAL	
TEMP. RANGE	-30° C → +70° C
CONNECTOR	N-female
WIND SURFACE	Approx. 0.009 m ²
WIND LOAD	Approx. 10 N (at 150 km/h)
COLOUR	Marine white
MATERIALS	Shroud: Polyurethane coated glassfiber Mounting bracket: Chromed brass
TOTAL HEIGHT	Approx. 630 mm
DIA. IN TOP END	12 mm
DIA. IN BOTTOM END	16 mm
WEIGHT	Approx. 350 g
MOUNTING	On 1" RG (G1"-11) threaded water pipe or on optional mounting brackets (see below)

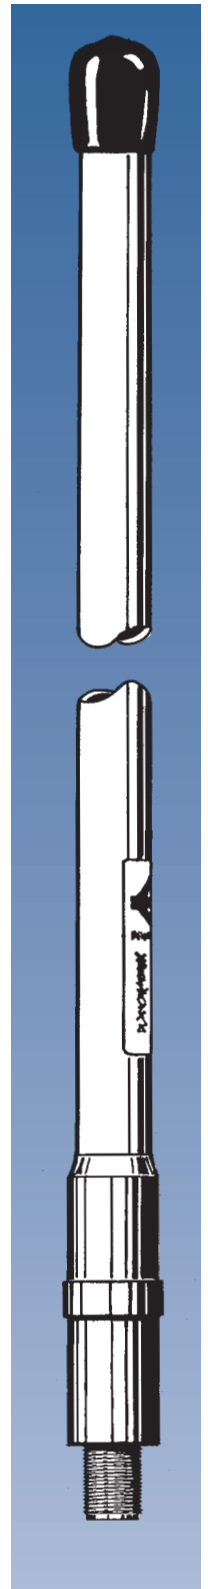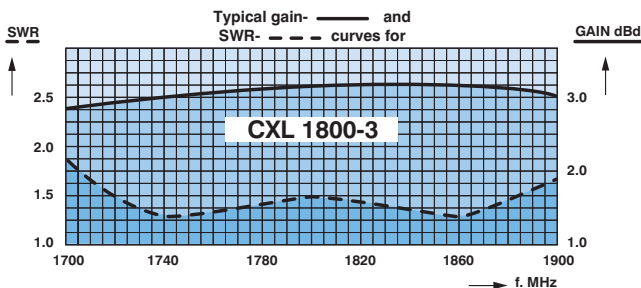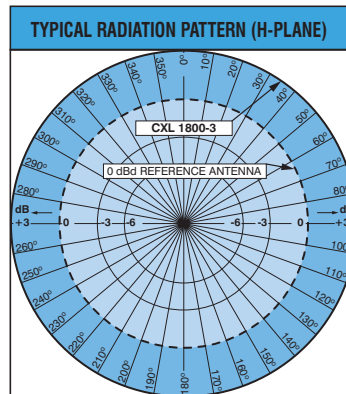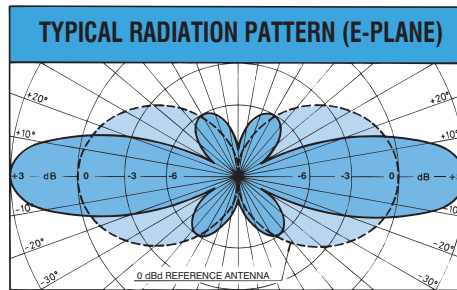

ACCESSORIES: (to be ordered separately)

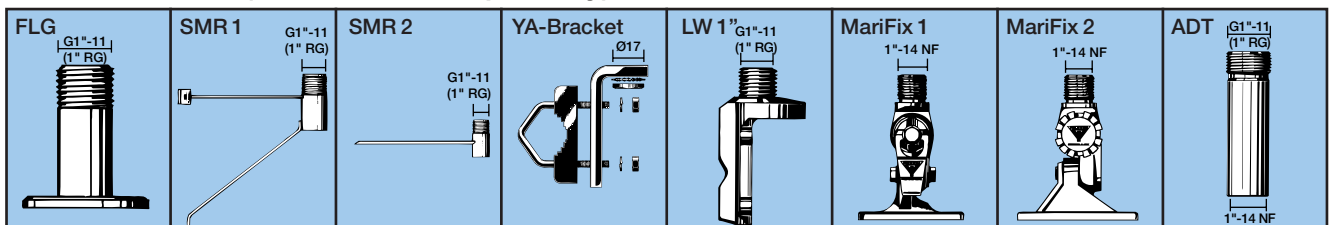

PROCOM A/S reserve the right to amend specifications without prior notice.