

# PRO-PDI2-40-1G-10 dB-10W-N

Power Divider 1:10

## DESCRIPTION



- 10 W unequal power divider.
- The divider covers the frequency range from 40 - 1000 MHz.
- Very little ripple on divider output over the entire frequency range.



TYPE	PRODUCT NO.
PRO-PDI2-40-1G-10 dB-10W-N	210000446

## SPECIFICATIONS

ELECTRICAL	
MODEL	PRO-PDI2-40-1G-10 dB-10W-N
FREQUENCY RANGE	40 - 1000 MHz
MAX. INPUT POWER	10 W
NOMINAL DIVIDER LOSS	0.45 dB
TOTAL LOSS INCL. NOMINAL LOSS	≤ 1.4 dB @ 40 MHz ≤ 2.2 dB @ 1000 MHz
ISOLATION OUTPUT TO OUTPUT	> 12 dB
DIVIDER OUTPUT	-10 dB ± 0.5 dB
IMPEDANCE	Nom. 50 Ω
INPUT SWR	< 1.5
MECHANICAL	
TEMP. RANGE	-30°C → +60°C
CONNECTORS	N-female
DIMENSIONS	138 (incl. connectors) x 152 (incl. flanges) x 35 mm
WEIGHT	Approx. 360 g

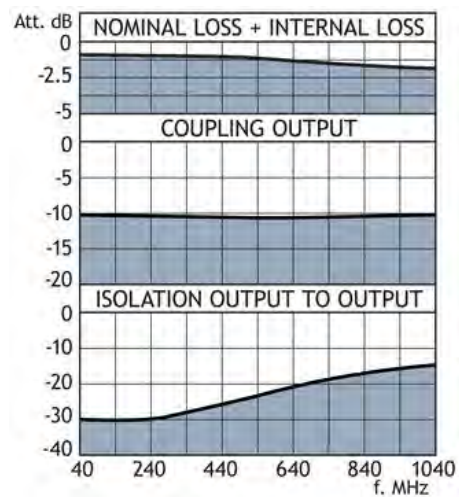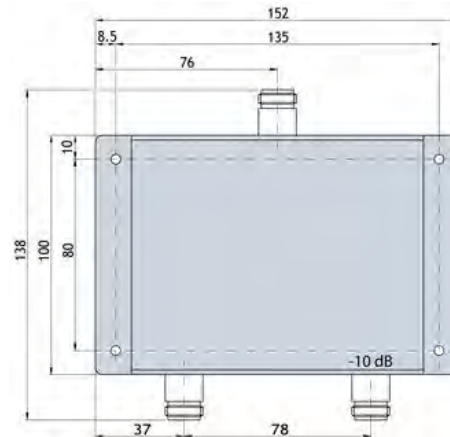

PROCOM A/S reserve the right to amend specifications without prior notice.

15/06/2011